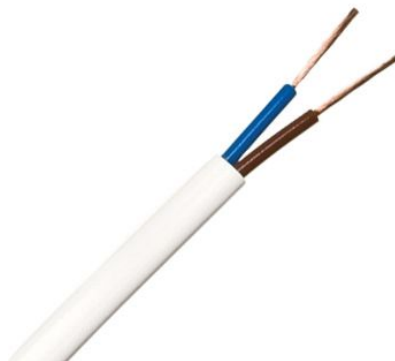

Application:

Used as an indoor general wiring cable primarily for installations in public areas. Examples include use on

Details:

Conductor	Plain copper conductor
Insulation	PVC (polyvinyl chloride)
Insulation Color	Blue,Brown
Jacket	PVC (polyvinyl chloride)
Jacket Color	Black or White
Voltage Rating	300/330V
Temperature Rating	0°C to +70°C
Minimum Bending Radius	6×overall diameter



Specification:

No.of Cores	Conductor		Insulation		Jacket	
	Section(mm ²)	Cond.	Nom.Thick(mm)	Nom.O.D.(mm)	Nom.Thick(mm)	Nom.O.D.(mm)
2	0.5	16/0.21mm	0.5	1.95	0.6	3.10×5.00
2	0.75	24/0.21mm	0.5	2.15	0.6	3.30×5.40

Order Informations:

Marking	KINGTONE KT0901 H03VVH2-F CABLE XXX M (or Per customer's request)
Inner Package	100m/Roll, 100m/Spool,305m/Spool (or Per customer's request)
Outer Package	Carton, Color Box, Pallet (or Per customer's request)
Delivery time	Normally 15 days after received the deposit.
More informations	please contact with us.

Online Service:

Skype	kingtone3
ICQ	246632889
